



Product data sheet

49713P/L1 - Branching box FC power 5G2.5mm² 3P C1 Q



Branching box with socket 3 pole code 1 for power current phase L1

Characteristics	
Eldas number	150710137
Base Unit	Piece
availability	available from stock
EAN Code	7611718219108
group	170000
Packing	50
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	40 g
Color	black
Coding plug connection	Code 1
Technical data	
Box Type	Junction boxes
Fire load (KWh)	0,18 kWh
Dimensions length x width x height (mm)	34,5x57,5x25,7 mm



Product data sheet

49713P/L1 - Branching box FC power 5G2.5mm² 3P C1 Q

Dimensions length x width x height (inch)	1,36x2,26x1,01 inch
Degree of protection	IP20, IP40 (Connected)
Metal parts	Korrosionsgeschützt
Flat cable contacting type	Piercing-Kontaktierung (Schraube)
Number of poles	3 pole
Rated current heavy current part (A)	16 A
Rated voltage heavy current part (V)	250 V
Operating Temperature (°C)	-15 bis 85 °C
Installation temperature min. (°C)	5 °C
Plastic parts	Halogenfrei
Material slider/bottom part	Polyamid, schwarz
Material housing	Polyamid , schwarz
Material hood	Polycarbonat, transparent
Number Screwdriver Pointed screws Heavy current part	1
Operating torque of pointed screws for heavy current section (Nm)	0,7 Nm



Product data sheet

49713P/L1 - Branching box FC power 5G2.5mm² 3P C1 Q

Product accessories


	49738P - Slide with plates power 5G2.5mm² Slider to junction boxes
	Stecker_01_03 - Connexions enfichable Code 1 pour tension de réseau, 3 pôles null
	49750 - Locking to connectors For mechanical connection of socket to plug 3 and 5 poles



Product data sheet

49713P/L1 - Branching box FC power 5G2.5mm² 3P C1 Q

Product systems

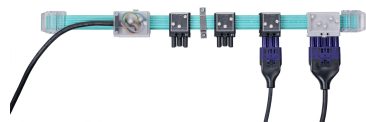

Flat cable system Power 5G2.5 mm²

This system is used in offices, supermarkets, shopping malls, exhibitions, industry and for lighting installations in parking garages, train stations or temporary installations. The numerous connections can be removed, attached or moved very easily

