




Product data sheet

33200/4OR - Screw spring terminal 4mm² orange

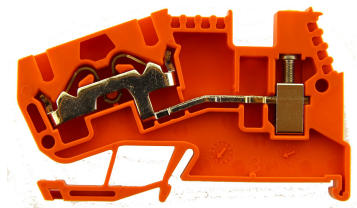

Screw spring clip with inscription 2x4 labels

Characteristics	
Eldas number	158136097
Base Unit	Piece
availability	Delivery according to agreement
EAN Code	7611718250361
group	165000
Packaging unit	50
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	11,4 g
Color	orange
Technical data	
Dimensions length x width x height (mm)	68.5x6x35 mm
Dimensions length x width x height (inch)	2.70x0.24x1.38 inch
Cross section (mm²)	0,5 - 4 mm²
Nominal current (A)	32 A



Product data sheet

33200/4OR - Screw spring terminal 4mm² orange

Rated voltage (V)	800 V
Connection type	Coil spring terminal
Number of connection point	3
Number of floor	1
Number of potentials	1
Clamping screw M	M3
Insulating material	PA66
Nominal Cross-section (mm²)	4 mm²
Stripping length mm (mm)	12 mm
Head reception room width x height (mm)	3.7x3.6 /3.2x4.6 mm
Rating data according to UL 1059	
Rated voltage US (V)	600 V
Nominal cross section (AWG)	12 AWG
Cross-section (AWG)	12 - 20 AWG
Stripping length (inch)	0,47 inch



## Product data sheet

33200/4OR - Screw spring terminal 4mm<sup>2</sup> orange

### Product accessories




#### Bezeichnungskarte\_6x12mm - Designation cards 6x12mm

Various designation labels 6x12mm with different embossing.



#### Bezeichnungskarte\_6x9mm - Designation card 6x9mm

Various designation plates with different embossing.



#### Bezeichnungskarte\_6x3mm - Designation card 6x3mm

Various designation plates with different embossing.

#### 33210 - Separation end wall to screw spring clamp

null



#### 3418 - Stopper DIN35 height 30mm

Makrolon locking piece



#### 30370 - Stopper DIN35 height 23mm

Locking piece made of nickel-plated brass M3 screw



#### 81506/2 - Cross-connection 2-pole to terminals DIN32/35 4mm<sup>2</sup>

Insulated cross-connection 2-pole to terminals DIN32/35 4mm<sup>2</sup> including screws M3.  
Standard version. Dimension: 11.1x20.8 mm



#### 81506/3 - Cross-connection 3-pole to terminals DIN32/35 4mm<sup>2</sup>

Insulated cross-connection 3-pole to terminals DIN32/35 4mm<sup>2</sup> including screws M3.  
Standard version. Dimension: 17.2x20.8 mm



#### 81506/4 - Cross-connection 4-pole to terminals DIN32/35 4mm<sup>2</sup>

Insulated cross-connection 4-pole to terminals DIN32/35 4mm<sup>2</sup> including screws M3.  
Standard version. Dimension: 23.3x20.8 mm



#### 81506/5 - Cross-connection 5-pole to terminals DIN32/35 4mm<sup>2</sup>

Insulated cross-connection 5-pole to terminals DIN32/35 4mm<sup>2</sup> including screws M3.  
Standard version. Dimension: 29.4x20.8 mm



#### 81506/10 - Cross-connection 10-pole to terminals DIN32/35 4mm<sup>2</sup>


Insulated cross-connections 10-pole to terminals DIN32/35 4mm<sup>2</sup> including M3 screws.  
Standard version. Dimension: 59.9x20.8 mm



## Product data sheet

33200/4OR - Screw spring terminal 4mm<sup>2</sup> orange

### Product systems



#### Screw-type plug-in spring terminals DIN 35

Various screw spring terminals.

