




Product data sheet

35410/2 - PE three-stock spring-cage terminal 1.5mm² gray

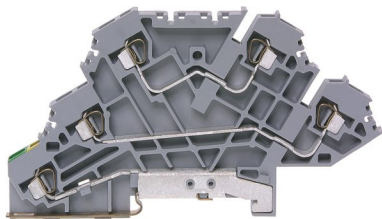

Cross-section range 0.2-1.5mm 2with stainless steel protective conductor connection spring Tinned copper connection bar
3.Stock continuous

Characteristics	
Eldas number	158442037
Base Unit	Piece
availability	available from stock
EAN Code	7611718217920
group	165000
Packaging unit	20
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	23 g
Color	gray
Technical data	
Dimensions length x width x height (mm)	108.7x6x56 mm
Dimensions length x width x height (inch)	4.28x0.24x2.21 inch
Cross section (mm²)	0,2 - 1,5 mm²
Nominal current (A)	10 A



Product data sheet

35410/2 - PE three-stock spring-cage terminal 1.5mm² gray

Rated voltage (V)	300 V
Connection type	Spring clamp
DIN rail type	DIN-35
Smallest connectable section (mm ²)	0,5 mm ²
Number of connection point	5
Number of floor	3
Number of potentials	3
Clamping screw M	M2.5
Central thread M	2.5
Insulating material	PA66
Nominal Cross-section (mm ²)	1,5 mm ²
Stripping length mm (mm)	8 mm
Rating data according to UL 1059	
Rated voltage US (V)	300 V
Nominal cross section (AWG)	16 AWG
Cross-section (AWG)	14 - 26 AWG
Smallest connectable section (AWG)	18 AWG
Stripping length (inch)	0,32 inch
Tightening torque (lb-inch)	4,4 lb-inch



Product data sheet

35410/2 - PE three-stock spring-cage terminal 1.5mm² gray

Product accessories



Bezeichnungskarte_6x9mm - Designation card 6x9mm


Various designation plates with different embossing.



Product data sheet

35410/2 - PE three-stock spring-cage terminal 1.5mm² gray

Product systems



Three-stud tension spring terminals DIN 35

Various three-stud tension spring clamps.

