





System overview

Floor channel BOK 8880 300x50mm integrated leveling device




Floor channel BOK 8880 300x50mm with integrated leveling device.

Components




55032 - Installation kit Sts 4FLF horizontal empty BOK

made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 376x47(53)x40mm Color: RAL 7032 pebble gray
Equipped: 1 pcs. blind hole clamp 8x2.5mm ² 10146




52353N - Angle connection BOK 8880/300x50 iN

with integrated leveling made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 50mm / nominal cover width 300mm



52354N - T-joint BOK 8880/300x50 iN

with integrated leveling made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted into groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 50mm / nominal cover width 300mm length: 1000mm



52355N - Cross connection BOK 8880/300x50 iN

with integrated leveling made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted into groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 50mm / nominal cover width 300mm length: 1000mm



52304 - End piece to leveling bar BOK 8880/300













Dimensions 260x50x4mm Leveling bar additionally used in case of non-existent brace





System overview

























Floor channel BOK 8880 300x50mm integrated leveling device

	52356 - End wall BOK 8880/300x50 SK made of sendzimir-galvanized steel sheet 1.5mm pressed into special aluminum profile Woertz with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover support including connecting material height 50mm / nominal cover width 300mm	
	52356/0 - End wall BOK 8880/300x50 SK 0 made of sendzimir-galvanized steel sheet 1.5mm including connecting material height 50mm / lid nominal width 306mm	
	52366 - St lid BOK 8880/300 SK KD made of sendzimir-galvanized steel sheet 4mm dimension: 500x300mm cable gland loosely enclosed	
	52368 - St lid BOK 8880/300 SK KMn made of sendzimir-galvanized steel sheet 4mm dimension: 500x300mm cable tray enclosed loose	
	52372/3 - 0 for 3mm edge, to BOK 8880/300, Length: 1000mm	
	52369 - St lid BOK 8880/300 SK made of sendzimir galvanized steel sheet 4mm dimension: 500x300mm	
	52373/3 - 0 for 3mm edge, to BOK 8880/300, Length: 500mm	
	52374/3 - 0 of aluminium dim 500x300 edge 3mm cable trough separately enclosed	
	52377 - Temporary wooden cover BOK 8880/300 for insertion as a placeholder and protection for the floor channel Dimension: 1000x301x12mm	
	52372/22 - 0 for 22mm edge, to BOK 8880/300, Length: 1000mm	
	52373/12 - 0 for 12mm edge, to BOK 8880/300, Length: 500mm	



System overview














Floor channel BOK 8880 300x50mm integrated leveling device

	52373/22 - 0 for 22mm edge, to BOK 8880/300,Length: 500mm	
	52410/22 - Al protective edge 22 BOK 8880 made of aluminumDimension: 2000x37x3mm	
	52372/12 - 0 for 12mm edge, to BOK 8880/300,Length: 1000mm	
	52410/3 - Al protective edge 3 BOK 8880 made of aluminumDimension: 2000x18x3mm	
	52410/12 - Al protective edge 12 BOK 8880 made of aluminumDimension: 2000x27x3mm	
	52412/3 - Cr protective edge 3 BOK 8880 made of chrome steel V2Adimension: 2000x18x3mm	
	52412/12 - Cr protective edge 12 BOK 8880 made of chrome steel V2Adimension: 2000x27x3mm	
	52412/22 - Cr protective edge 22 BOK 8880 made of chrome steel V2Adimension: 2000x37x3mm	
	52367 - St lid BOK 8880/300 SK BL made of sendzimir-galvanized steel sheet 4mm dimension: 500x300mm with brush strips as cable outlet, for 3mm finished floor height	
	52365 - St lid BOK 8880/300 SK made of sendzimir galvanized steel sheet 4mm dimension: 1000x300mm	
	52374/12 - 0 of aluminiumdim 500x300edge 12mm cable trough separately enclosed	
	52374/22 - 0 of aluminiumdim 500x300edge 22mm cable trough separately enclosed	



System overview

Floor channel BOK 8880 300x50mm integrated leveling device

	<p>52345 - Installation kit Scs 3FLF horizontal empty BOK</p> <p>Low current version made of sendzimir galvanized sheet steel 1.5mm with strain relief stampings and knurled screw for lateral fixing in the trunking shell</p> <p>Dimension: 400x95x41.4mm</p> <p>Color: RAL 7032 pebble gray</p>	
	<p>51996 - Installation kit Scs 2FLF horizontal empty BOK</p> <p>Low current version made of galvanized steel sheet 1.5mm with strain relief stampings and knurled screw for lateral fixing in the trunking shell. Color: RAL 7032 pebble gray</p>	
	<p>52350N - Floor duct BOK 8880/300x50 iN</p> <p>with integrated leveling made of sendzimir galvanized steel sheet 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted into groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 50mm / nominal cover width 300mm length: 2000mm</p>	
	<p>52091 - Mounting bracket 1 FLF 3/5 empty BOK</p> <p>made of galvanized sheet steel color: RAL 7032 pebble gray</p>	
	<p>52365/0 - St lid BOK 8880/300 SK 0</p> <p>made of sendzimir galvanized steel sheet 4mm dimension: 1000x306mm</p>	
	<p>55039 - Installation kit socket outlet T13 3FLF horizontal SB BOK</p> <p>Installation kit socket T13 3FLF horizontal SB BOK made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped, wired and tested: 1 pcs. blind terminal 7x2.5mm² 10127 3 pcs. socket T13 FLF white 55200 1x L1 / 1x L2 / 1x L3 1 pc. Td-cable 5x1.5mm² / 1000mm 1 pc. FK junction box technofil 49909 (10A)</p>	
	<p>55041 - Installation kit socket T23 3FLF horizontal SB BOK</p> <p>Installation kit socket T23 3FLF horizontal SB BOK made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped, wired and tested: 1 pcs. blind terminal 7x2.5mm² 10127 3 pcs. socket T23 FLF white 55210 1x L1 / 1x L2 / 1x L3 1 pc. Td-cable 5x2.5mm² / 1000mm 1 pc. FK socket SK ecobus power 5x2.5² Pow 5P 49701P (16A)</p>	



System overview



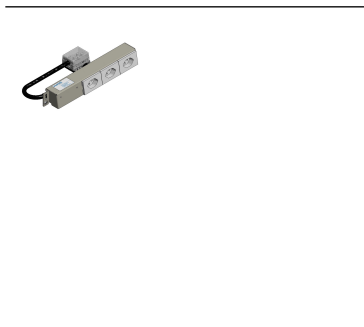

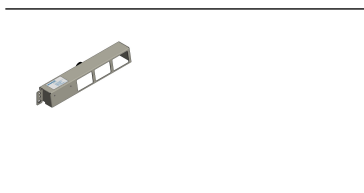

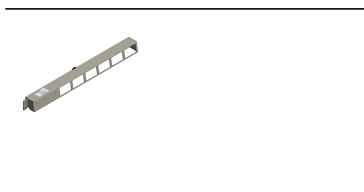







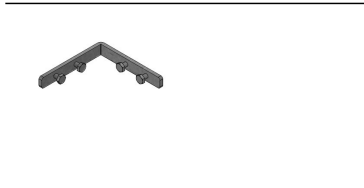

Floor channel BOK 8880 300x50mm integrated leveling device

	51880 - Cable bushing with filler piece BOK made of polycarbonate crystal clear with transparent filler Dimension: 86x60x9.5mm	
	52369/0 - St lid BOK 8880/300 SK 0 made of sendzimir galvanized steel sheet 4mm dimension 500x306mm	
	52367/0 - St lid BOK 8880/300 SK 0 BL made of sendzimir-galvanized steel sheet 4mm dimension: 500x306mm with brush strips as cable outlet, for 3mm finished floor height	
	52368/0 - St lid BOK 8880/300 SK 0 KMn made of sendzimir-galvanized steel sheet 4mm dimension: 500x306mm with cable trough enclosed loose	
	52367/0SB - St lid visible BOK 8880/300 SK 0 BL made of sendzimir galvanized sheet steel 4mm dimension: 500x306mm with brush strip as cable outlet, top flush with lid for visible lid	
	52366/0 - St lid BOK 8880/300 SK 0 KD made of sendzimir galvanized steel sheet 4mm dimension: 500x306mm with cable gland	
	52379/0SB - Cr lid visible BOK 8880/300 SK 0 made of chrome steel V2A 4mm, brushed Dimensions: 490x306mm With brush strip 54x30mm as a cable outlet top flush for visible cover	
	52378/0SB - Cr lid visible BOK 8880/300 SK 0 made of chrome steel V2A 4mm, brushed dimension: 990x306mm	
	55019 - Installation kit bticino 2x2-3gang empty BOK made of galvanized sheet steel color: RAL 7032 pebble gray	
	52401 - Mounting bracket 50 BOK 8880/50 made of sheet steel 2.5mm for floor trunking BOK 8880 height 50mm	

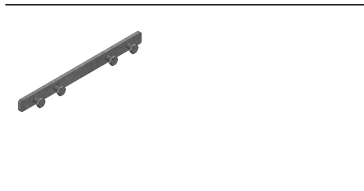

System overview


Floor channel BOK 8880 300x50mm integrated leveling device

	<p>52407 - Connecting link straight BOK 8880</p> <p>made of sheet steel dimension: 130x10x2.5mm with 4 pieces hexagonal screws M4x8 for connecting the channel shells</p>	
	<p>52344 - Insert Sts 3FLF horizontal SB BOK</p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell Dimensions: 302x47(53)x40mm Color: RAL 7032 pebble gray equipped, wired and tested: 1 pcs. blind hole terminal 7x2.5mm² 10127 3 pcs. socket T13 FLF white 55200 1x L1 / 1x L2 / 1x L3 1 pcs. Td cable 5x1.5mm² / 1000mm. 1 pc. FK socket SK ecobus power 5x2.5² Pow 5P 49701P (16A)</p>	
	<p>55031 - Installation kit Sts 3FLF horizontal empty BOK</p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped: 1 pcs. blind hole clamp 7x2.5mm² 10127</p>	
	<p>55033 - Installation kit Sts 6FLF horizontal empty BOK</p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 525x47(53)x40mm Color: RAL 7032 pebble gray Equipped: 1 pcs. blind hole clamp 10x2.5mm² 10128</p>	
	<p>51049 - Adjustable cable trough BOK 8880 fDsb</p> <p>made of polycarbonate crystal clear for cover visible for mounting with threaded bolt</p>	
	<p>51069 - Cable trough levelable BOK SK 0-21mm</p> <p>made of polycarbonate crystal clear for cover visible for mounting with threaded bolt</p>	
	<p>52415 - U-clamp profile reinforced 1-3mm</p> <p>as edge protection profile for sheet thickness up to 3mm</p>	
	<p>52408 - Angle connecting link 90° BOK 8880</p> <p>made of sheet steel dimension: 67.5/67.5x10x2.5mm with 4 pcs hexagonal bolts M4x8 for connecting the channel shells</p>	



System overview

Floor channel BOK 8880 300x50mm integrated leveling device



52304/100 - Leveling bar connection BOK 8880/300

made of sendzimir galvanized steel sheet 4mm dimensions: 260x100mm with 3 leveling hexagonal screws M10x60 polyamide with blind rivets for fastening to channel shell for additional mounting in case of missing connection.



52420 - Brush strip cpl. BOK 8880 s=6

made of plastic, black dimension: 54x35mm bristles length: 25mm



52421 - Brush strip cpl. BOK 8880 s=4 visible

made of plastic, black dimension: 54x37mm bristles length: 30mm

