



Product data sheet

49703P - Junction box FK power 5G2.5 mm<sup>2</sup> flat 2x5P



Junction box 5P Flat version for branching with screw connection

Characteristics	
Eldas number	150701017
Base Unit	Piece
availability	Delivery according to agreement
EAN Code	7611718218002
group	170000
Packaging unit	50
country of origin	CH
Customs tariff number	853669
Weight (g)	72 g
Color	gray
Technical data	
Box Type	Junction boxes
Fire load (KWh)	0,38 kWh
Dimensions length x width x height (mm)	96x60x23 mm
Dimensions length x width x height (inch)	3,78x2,36x0,91 inch



## Product data sheet

### 49703P - Junction box FK power 5G2.5 mm<sup>2</sup> flat 2x5P

Degree of protection	IP20
Metal parts	Corrosion protected
Flat cable contacting type	Piercing contact (screw)
Number of poles	5 pole
Contacting type	Plug-in terminal
Connection conductor (mm <sup>2</sup> )	(2x)5x1.5 mm <sup>2</sup> wire or stranded wire with core sleeve mm <sup>2</sup>
Rated current heavy current part (A)	17.5(1.5mm <sup>2</sup> ) A
Rated voltage heavy current part (V)	690 V
Operating Temperature (°C)	-15 to 85 °C
Installation temperature min. (°C)	5 °C
Plastic parts	Halogen-free
Material slider/bottom part	Polyamide, gray
Material housing	Polyamide, gray
Material hood	Polycarbonate, transparent
Number Screwdriver Pointed screws Heavy current part	1
Operating torque of pointed screws for heavy current section (Nm)	0,7 Nm



## **Product data sheet**

49703P - Junction box FK power 5G2.5 mm<sup>2</sup> flat 2x5P


### **Product accessories**



## Product data sheet

49703P - Junction box FK power 5G2.5 mm<sup>2</sup> flat 2x5P

### Product systems

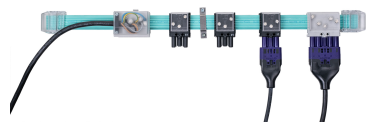

**Flat cable system Power 5G2.5 mm<sup>2</sup>**

Our solutions for every location. Whether office, supermarket, shopping center, exhibition, industry or temporary installations such as parking garages and train stations - our system adapts flexibly to any environment. Experience reliable power supply at the highest level.

