



## Product data sheet

Stecker\_01\_05 - Connexions enfichable Code 1 pour tension de réseau, 5 pôles (3LNPE)

### Characteristics

---



## **Product data sheet**

Stecker\_01\_05 - Connexions enfichable Code 1 pour tension de réseau, 5 pôles (3LNPE)

### **Product accessories**



## Product data sheet

Stecker\_01\_05 - Connexions enfichable Code 1 pour tension de réseau, 5 pôles (3LNPE)

### Product systems



#### Flat cable system Combi 5G2.5 2x1.5 mm² (KNX)


This flexible system is the basis for decentralized building automation and combines power current and bus data line in a single cable application.

The areas of application are office and public buildings, industrial buildings, hotels or even modular buildings with a high degree of prefabrication for quick installation.




#### Flat cable system Dali IP 5G2.5 2x1.5 mm² (IP66/68)

This flexible system combines power current and Dali bus line in one cable application. Due to the high IP protection degree IP66/68 this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.



#### Flat cable system Combi 5G2.5 2x1.5 mm²

Intelligent building control in a flexible system. Power current and bus data line combined for maximum efficiency. For office and public buildings, industrial buildings, hotels and modern modular buildings. Experience the future of building automation with our innovative solution.

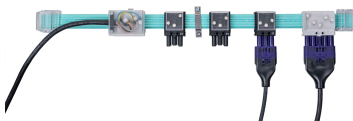

#### Flat cable system Power 5G2.5 mm²

Our solutions for every location. Whether office, supermarket, shopping center, exhibition, industry or temporary installations such as parking garages and train stations - our system adapts flexibly to any environment. Experience reliable power supply at the highest level.



#### Flat cable system Power IP 5G2.5 mm² (IP66/68)

Due to the high IP protection degree IP66/68, this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.





## Product data sheet

Stecker\_01\_05 - Connexions enfichable Code 1 pour tension de réseau, 5 pôles (3LNPE)




### Flat cable system Technofil 5G2.5 mm<sup>2</sup>

Maximum flexibility for complex requirements. Discover our system with a variety of junction boxes to combine consumer lines according to your individual needs.



### Flat cable system Power 5G4 mm<sup>2</sup>

This system is used for long corridors, offices, supermarkets, industrial halls and for lighting in railroad stations and parking garages.

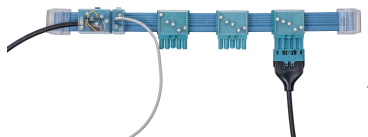

### Flat cable system Dali 5G2.5 2x1.5 mm<sup>2</sup>

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.

