



Product data sheet

49733 - Fastening clamp FC combi / power



Cable clamp screw-on, for flat cable power 5G2.5 mm²

Characteristics	
Eldas number	150900117
Base Unit	Piece
availability	available from stock
EAN Code	7611718221262
group	170000
Packaging unit	100
country of origin	CH
Customs tariff number	391740
Weight (g)	3,71 g
Technical data	
Fire load (KWh)	0,03 kWh
Dimensions length x width x height (mm)	15x40x8 mm
Dimensions length x width x height (inch)	0.59x1.57x0.31 inch
Material	Polyamide



Product data sheet

49733 - Fastening clamp FC combi / power

Product accessories



Product data sheet


49733 - Fastening clamp FC combi / power

Product systems




Cable clamps and accessories

Various flat cable clamps and clamps for fastening.

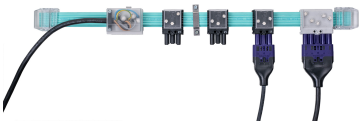

Flat cable system Power 5G2.5 mm²

Our solutions for every location. Whether office, supermarket, shopping center, exhibition, industry or temporary installations such as parking garages and train stations - our system adapts flexibly to any environment. Experience reliable power supply at the highest level.

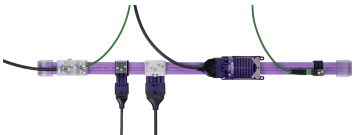

Flat cable system Combi 5G2.5 2x1.5 mm²


Intelligent building control in a flexible system. Power current and bus data line combined for maximum efficiency. For office and public buildings, industrial buildings, hotels and modern modular buildings. Experience the future of building automation with our innovative solution.



Flat cable system Combi 5G2.5 2x1.5 mm² (KNX)

This flexible system is the basis for decentralized building automation and combines power current and bus data line in a single cable application.

The areas of application are office and public buildings, industrial buildings, hotels or even modular buildings with a high degree of prefabrication for quick installation.

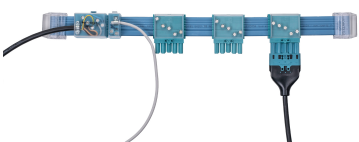

Flat cable system Dali 5G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.


The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.





Product data sheet

49733 - Fastening clamp FC combi / power

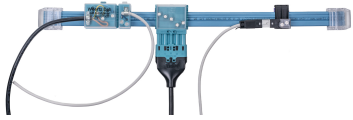

Flat cable system Dali 3G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application and is the basis for decentralized lighting control. The application areas are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.



Flat cable system Power IP 5G2.5 mm² (IP66/68)

Due to the high IP protection degree IP66/68, this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.

