



Product data sheet

49731 - Fastening clamp FC combi / power



to screw on

Characteristics	
Eldas number	120008107
Base Unit	Piece
availability	available from stock
EAN Code	7611718199288
group	170000
Packaging unit	100
country of origin	CH
Customs tariff number	392590
Weight (g)	1,91 g
Technical data	
Fire load (KWh)	0,02 kWh
Dimensions length x width x height (mm)	52x10x10 mm
Dimensions length x width x height (inch)	2.05x0.39x0.39 inch



Product data sheet

49731 - Fastening clamp FC combi / power

Product accessories



Product data sheet

49731 - Fastening clamp FC combi / power

Product systems



Cable clamps and accessories


Various flat cable clamps and clamps for fastening.



Flat cable system Combi 5G2.5 2x1.5 mm² (KNX)

This flexible system is the basis for decentralized building automation and combines power current and bus data line in a single cable application.


The areas of application are office and public buildings, industrial buildings, hotels or even modular buildings with a high degree of prefabrication for quick installation.

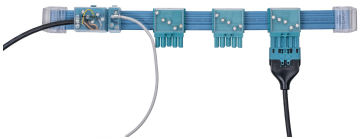

Flat cable system Dali 5G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.



Flat cable system Dali 3G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application and is the basis for decentralized lighting control. The application areas are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.



Flat cable system Power 7G2.5 mm² and 7G4 mm² (IP65)


The flexible system is ideally suited for combined application with power current incl. control line. It is mainly used in the industrial sector, but is also suitable for all common building installations.






Product data sheet

49731 - Fastening clamp FC combi / power

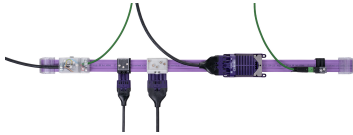

Flat cable system Combi 5G2.5 2x1.5 mm²

Intelligent building control in a flexible system. Power current and bus data line combined for maximum efficiency. For office and public buildings, industrial buildings, hotels and modern modular buildings. Experience the future of building automation with our innovative solution.

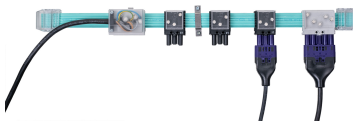

Flat cable system Power 5G2.5 mm²

Our solutions for every location. Whether office, supermarket, shopping center, exhibition, industry or temporary installations such as parking garages and train stations - our system adapts flexibly to any environment. Experience reliable power supply at the highest level.



Flat cable system Power IP 5G2.5 mm² (IP66/68)

Due to the high IP protection degree IP66/68, this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.



Flat cable system Dali IP 5G2.5 2x1.5 mm² (IP66/68)

This flexible system combines power current and Dali bus line in one cable application. Due to the high IP protection degree IP66/68 this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.

