



Product data sheet

48510/07 - End piece combi / DALI 5G2.5mm²+2x1.5mm² IP68



End piece IP68 for flat cables combi /DALI 5G2.5mm²+2x1.5mm².

Characteristics	
Eldas number	120900607
Base Unit	Piece
availability	available from stock
EAN Code	7611718250910
group	170000
Packaging unit	4
country of origin	CH
Customs tariff number	392590
Weight (g)	14 g
Color	transparent
Coding plug connection	Code 1 + Code 4
Technical data	
Dimensions length x width x height (mm)	66x43x26 mm
Dimensions length x width x height (inch)	2.60x1.69x1.02 inch
Degree of protection	IP68



Product data sheet

48510/07 - End piece combi / DALI 5G2.5mm²+2x1.5mm² IP68

Material	Polycarbonate
Rated current heavy current part (A)	16 A
Rated voltage heavy current part (V)	250 V
Installation temperature min. (°C)	5 °C



Product data sheet

48510/07 - End piece combi / DALI 5G2.5mm²+2x1.5mm² IP68

Product accessories



49864/FRNC - Flat cable DALI IP 5G2.5mm² 2x1.5mm² FR/LS0H

Woertz Dali IP 5x2.5mm² 2x1.5mm², halogen-free, FR/LS0H, light gray, 3LNPE, B2ca s1 d0 a1,



Product data sheet


48510/07 - End piece combi / DALI 5G2.5mm²+2x1.5mm² IP68

Product systems



Cable end pieces

Cable end pieces for flat cable

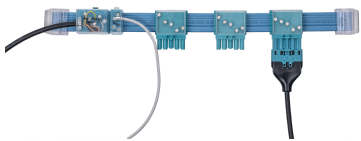

Flat cable system Dali 5G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.



Flat cable system Combi 5G2.5 2x1.5 mm² (KNX)


This flexible system is the basis for decentralized building automation and combines power current and bus data line in a single cable application.

The areas of application are office and public buildings, industrial buildings, hotels or even modular buildings with a high degree of prefabrication for quick installation.



Flat cable system Dali IP 5G2.5 2x1.5 mm² (IP66/68)

This flexible system combines power current and Dali bus line in one cable application. Due to the high IP protection degree IP66/68 this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.

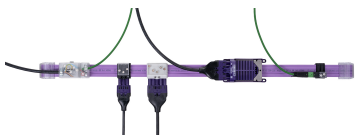

Flat cable system Combi 5G2.5 2x1.5 mm²

Intelligent building control in a flexible system. Power current and bus data line combined for maximum efficiency. For office and public buildings, industrial buildings, hotels and modern modular buildings. Experience the future of building automation with our innovative solution.

