



Product data sheet

48100/L3/3C1/S - Quick connect box FC Power 5G2.5 branching 3 pole, code 1 (L3)



Quick-connect outlet IP20/IP40 with 3-pole socket Code1, assignment L3-N-PE, 250V 20A, for flat cable Art.49845 and

Characteristics	
Eldas number	150700307
Base Unit	Piece
availability	available from stock
EAN Code	7611718278846
group	170000
Packing	5
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	190 g
Color	purple
Coding plug connection	Code 1
Technical data	
Box Type	Junction boxes
Dimensions length x width x height (mm)	113x61x36 mm
Degree of protection	IP20, IP40 (Connected)



Product data sheet

48100/L3/3C1/S - Quick connect box FC Power 5G2.5 branching 3 pole, code 1 (L3)

Flat cable contacting type	Piercing-Kontaktierung (Messer)
Number of poles	3 pole
Rated current heavy current part (A)	20 A
Rated voltage heavy current part (V)	250 V
Operating Temperature (°C)	-15 bis 85 °C
Installation temperature min. (°C)	5 °C
Plastic parts	halogenfrei



Product data sheet

48100/L3/3C1/S - Quick connect box FC Power 5G2.5 branching 3 pole, code 1 (L3)

Product accessories


	<b>Stecker_01_03 - Connexions enfichable Code 1 pour tension de réseau, 3 pôles</b> null
--	---



## Product data sheet

48100/L3/3C1/S - Quick connect box FC Power 5G2.5 branching 3 pole, code 1 (L3)

### Product systems

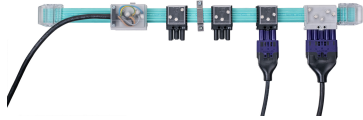

#### Flat cable system Power 5G2.5 mm<sup>2</sup>

This system is used in offices, supermarkets, shopping malls, exhibitions, industry and for lighting installations in parking garages, train stations or temporary installations. The numerous connections can be removed, attached or moved very easily



#### Quick Connect Box 48100 Power Series

Quick Junction Boxes Series 48100 for flat cable Power 5G2.5mm<sup>2</sup>  
The screwless quick junction box allows an even easier and safer installation compared to existing connection systems. A tool-less assembly (assembly errors due to cable geometry impossible), connection longitudinal, use even in narrow ducts, time required for installation less than 1 minute, integrated mounting for ceiling or wall installations.

