




Product data sheet

35350/3TM - Spring clamp Disconnecting terminal 2.5mm<sup>2</sup>

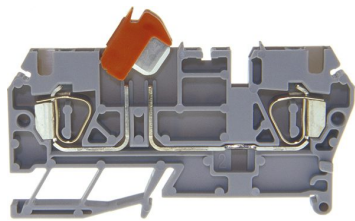

Characteristics	
Eldas number	158460137
Base Unit	Piece
availability	available from stock
EAN Code	7611718222597
group	165000
Packaging unit	25
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	9 g
Color	gray
Technical data	
Dimensions length x width x height (mm)	71x5x31 mm
Dimensions length x width x height (inch)	2.80x0.20x1.22 inch
Cross section (mm <sup>2</sup> )	0,2 - 2,5 mm <sup>2</sup>
Nominal current (A)	10 A



## Product data sheet

### 35350/3TM - Spring clamp Disconnecting terminal 2.5mm<sup>2</sup>

Rated voltage (V)	24 V
Connection type	Spring clamp
DIN rail type	DIN-35
Smallest connectable section (mm <sup>2</sup> )	0,5 mm <sup>2</sup>
Number of connection point	2
Number of floor	1
Number of potentials	1
Clamping screw M	M3
Insulating material	PA66
Nominal Cross-section (mm <sup>2</sup> )	2,5 mm <sup>2</sup>
Stripping length mm (mm)	10 mm

#### Rating data according to UL 1059

Rated voltage US (V)	24 V
Nominal cross section (AWG)	14 AWG
Cross-section (AWG)	14 - 26 AWG
Smallest connectable section (AWG)	22 AWG
Stripping length (inch)	0,39 inch
Tightening torque (lb-inch)	5,3 lb-inch



## Product data sheet

35350/3TM - Spring clamp Disconnecting terminal 2.5mm<sup>2</sup>

### Product accessories




**80247 - Test plug Ø 2.3mm red, socket 4mm**

connecting cable incl.




**80248 - Test plug Ø 2.3mm black, socket 4mm**

connecting cable incl.



**Bezeichnungskarte\_5x12mm - Designation card 5x12mm**

Various designation plates



**Bezeichnungskarte\_5x9mm - Designation card 5x9mm**

Various designation plates with different embossing.



**35455/09BS - Marking strip 9x240mm**

with 25strips per box



**35455/59T - Marking adaptor for label 5x9mm**

null




**35341/3 - Partition and end barrier 88x36mm**

grey, to spring clamp terminals with 3 and 4 clamps




**35445 - End retainer for Spring clamp terminal DIN35**

of polyamide 66, grey dimensions: 8x45.2x23.5mm to spring clamp terminals 1.5 to 16mm 2



**35425/05 - Center jumper cover grey**

Cross-connection rake insulated, gray, to tension spring terminals 5mm



**35425/05BR - Bridge to cross-junction rack grey**

Bridge insulated, suitable for 3542505 to connect 2 connecting rakes. 33.2x6x10.4 mm



**35435/302 - Cable entrance to 0.2mm<sup>2</sup> conductors**

funnel-shaped, to spring clamp terminals 1.5 and 2.5mm 2Stripes of 10 pieces, separable



**35435/305 - Cable entrance to 0.5mm<sup>2</sup> conductors**

funnel-shaped, to spring clamp terminals 1.5 and 2.5mm 2Stripes of 10 pieces, separable



Product data sheet

35350/3TM - Spring clamp Disconnecting terminal 2.5mm2



**35435/310 - Cable entrance to 1mm2 conductors**


funnel-shaped, to spring clamp terminals 1.5 and 2.5mm 2Stripes of 10 pieces, separable



## Product data sheet

35350/3TM - Spring clamp Disconnecting terminal 2.5mm<sup>2</sup>

### Product systems



#### Tension spring disconnect terminal blocks DIN 35

Various tension spring disconnect terminals.

