



Product data sheet

49935 - Cutting shears up to 6 mm²



Woertz flat cable shears up to 5x6 mm² (with higher force up to 5x16 mm²)

Characteristics	
Base Unit	Piece
availability	available from stock
EAN Code	7611718274299
group	170000
Packaging unit	1
country of origin	CH
Customs tariff number	8203.2000
Weight (g)	475,23 g
Technical data	
Dimensions length x width x height (mm)	24.5 mm



Product data sheet

49935 - Cutting shears up to 6 mm²


Product accessories



Product data sheet

49935 - Cutting shears up to 6 mm²

Product systems

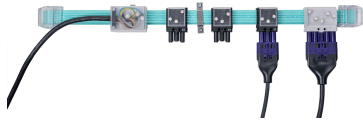

Power 5G2.5 mm² flat cable system

Our solutions for every location. Whether office, supermarket, shopping center, exhibition, industry or temporary installations such as parking garages and train stations - our system adapts flexibly to any environment. Experience reliable power supply at the highest level.




Flat cable system Power IP 5G2.5 mm² (IP66/68)

Due to the high IP protection degree IP66/68, this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open air.



Flat cable system Technofil 5G2.5 mm²


Maximum flexibility for complex requirements. Discover our system with a variety of junction boxes to combine consumer lines according to your individual needs.

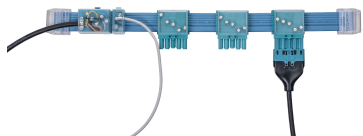

Flat cable system Dali 5G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.

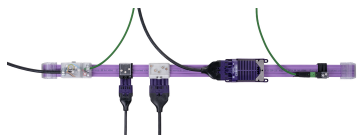

Flat cable system Combi 5G2.5 2x1.5 mm²

Intelligent building control in a flexible system. Power current and bus data line combined for maximum efficiency. For office and public buildings, industrial buildings, hotels and modern modular buildings. Experience the future of building automation with our innovative solution.



FE180 E30/E90 5G4 mm²

Woertz fire safety system FE180 E30/E90 5G4 mm² for power supply of safety-relevant elements, such as emergency and escape route lighting, smoke extraction systems or fire department elevators.





Product data sheet

49935 - Cutting shears up to 6 mm²



Flat cable system Data 2x1.5 mm²

Compact networking for intelligent building automation. Perfect for KNX, Dali, SMI, LON and more. Space-saving design.



FE180 E30/E90 3G4 mm²

Woertz fire safety system FE180 E30/E90 3G4 mm² for power supply of safety-relevant elements, such as emergency and escape route lighting, smoke extraction systems or fire department elevators.



Flat cable system Power 7G2.5 mm² and 7G4 mm² (IP65)

The flexible system is ideally suited for combined application with power current incl. control line. It is mainly used in the industrial sector, but is also suitable for all common building installations.



LED flat cable light system 2xDC IP 3G2.5 mm² and 3G4 mm² (IP66/68)

Quick connection with 24 Vdc LED, type A/B variety, IP66/68 robustness. Combined with high-quality cables such as halogen-free 3x2.5 mm²



Stripping / stripping tool

Stripping and stripping tools eye and flat cable insulation tape.



Flat cable system Power 5G16 mm² (IP65)

Robust, weatherproof and powerful - a flexible power supply solution for construction temporary buildings, offices, tunnels, ships, halls, trade fairs and e-mobility.



Flat cable system Power 5G16 mm² (IP65)



Flat cable system Power 5G16 mm² (IP65)





Product data sheet

49935 - Cutting shears up to 6 mm²



Flat cable system Combi 5G2.5 2x1.5 mm² (KNX)

This flexible system is the basis for decentralized building automation and combines power current and bus data line in a single cable application.

The areas of application are office and public buildings, industrial buildings, hotels or even modular buildings with a high degree of prefabrication for quick installation.



Flat cable system Power IP 5G6 mm² (IP66/68)

This system with 5G6 mm² is used for tunnel construction, civil engineering, industrial plants, workshops and joineries, as well as outdoors for events and open airs due to the high IP protection degree.



Flat cable system Dali IP 5G2.5 2x1.5 mm² (IP66/68)

This flexible system combines power current and Dali bus line in one cable application. Due to the high IP protection degree IP66/68 this system is suitable in environments with high humidity, dust and oil and is therefore often used in tunnels, in civil engineering, in industrial plants, workshops and joineries, as well as outdoors for parking lot lighting, events and open airs.




Flat cable system Power 5G4 mm²

This system is used for long corridors, offices, supermarkets, industrial halls and for lighting in railroad stations and parking garages.



Flat cable system Multibus 4x1.5 mm²

Smart solutions for building control. Ideal for extra-low voltage, heating, ventilation, air conditioning and Belimo MP-Bus. Meets SMI LoVo requirements. Optimize your building technology!



Flat cable system Dali 3G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application and is the basis for decentralized lighting control. The application areas are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.





Product data sheet

49935 - Cutting shears up to 6 mm²



FE180 E30/E90 5G2.5 mm²

Woertz Fire Safety System FE180 E30/E90 5G2.5 mm² for power supply of safety-relevant elements, such as emergency and escape route lighting, smoke extraction systems or fire department elevators.



FE180 E30/E90 3G2.5 mm²

Woertz Fire Safety System FE180 E30/E90 3G2.5 mm² for power supply of safety-relevant elements, such as emergency and escape route lighting, smoke extraction systems or fire department elevators.



Flat cable system IP 3G2.5 mm² and 3G4 mm² (IP66/68)

This system is used in tunnelling, civil engineering, industrial plants, workshops and joineries, as well as outdoors for events and open airs, due to its high IP protection level and extraordinary flexibility in terms of changeability and expandability.



Flat cable system 3G2.5 mm² and 3G4 mm²

Effortless installation. Limitless flexibility. Discover the versatile system for workshops, commercial spaces and laboratories.



FE180 E30/E90 5G6 mm²

Woertz fire safety system FE180 E30/E90 5G6 mm² for power supply of safety-relevant elements, such as emergency and escape route lighting, smoke extraction systems or fire department elevators.

