




Product data sheet

30403 - Three-pin initiator terminal DIN35 2.5mm² (6 clamping points)

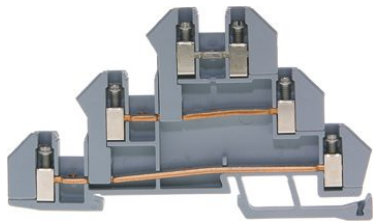

Three-pole initiator terminal DIN35 2.5mm² for power supply with 6 terminal points

Characteristics	
Eldas number	158602037
Base Unit	Piece
availability	Delivery in 4 weeks
EAN Code	7611718204678
group	165000
Packaging unit	25
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	13 g
Color	gray
Technical data	
Dimensions length x width x height (mm)	87x5.08x44 mm
Dimensions length x width x height (inch)	3.43x0.20x1.73 inch
Cross section (mm ²)	1 - 2,5 mm ²
Nominal current (A)	16 A



Product data sheet

30403 - Three-pin initiator terminal DIN35 2.5mm² (6 clamping points)

Rated voltage (V)	380 V
Connection type	Screw terminal
DIN rail type	DIN-35
Number of connection point	6
Number of floor	3
Number of potentials	3
Clamping screw M	M2.5
Insulating material	PA66
Nominal Cross-section (mm ²)	2,5 mm ²
Stripping length mm (mm)	7 mm
Head reception room width x height (mm)	2.4x3 mm
Rating data according to UL 1059	
Rated voltage US (V)	300 V
Nominal cross section (AWG)	14 AWG
Cross-section (AWG)	14 - 18 AWG
Stripping length (inch)	0,28 inch



Product data sheet

30403 - Three-pin initiator terminal DIN35 2.5mm² (6 clamping points)

Product accessories




80247 - Test plug Ø 2.3mm red, socket 4mm

connecting cable incl.



80248 - Test plug Ø 2.3mm black, socket 4mm

connecting cable incl.



Bezeichnungskarte_5x5mm - Designation card 5x5mm

Various designation plates with different embossing.



30407 - End barrier DIN35 grey to 30403

End wall suitable for 30403



3418 - Stopper DIN35 height 30mm

Makrolon locking piece



81535/2 - Cross-connection 2-pole to three-pin initiator terminal blocks DIN35 2.5mm²

Insulated cross-connection 2-pole to three-pole initiator terminals DIN35 2.5mm² including screws M2.5. dimension: 9.1x11.4 mm



81535/3 - Cross-connection 3-pole to three-pin initiator terminal blocks DIN35 2.5mm²

Insulated cross-connections to three-pin initiator terminal DIN35 2.5mm² including screws M2.5. dimension: 14.2x11.4 mm



81535/4 - Cross-connection 4-pole to three-pin initiator terminal blocks DIN35 2.5mm²

Insulated cross-connection 4-pole to three-pin initiator terminal DIN35 2.5mm² including screws M2.5. dimension: 19.3x11.4 mm



81535/5 - Cross-connection 5-pole to three-pin initiator terminal blocks DIN35 2.5mm²

Insulated cross-connection 5-pole to three-pin initiator terminals DIN35 2.5mm² including screws M2.5. dimension: 24.4x11.4 mm



81535/10 - Cross-connection 10-pole to three-pin initiator terminals DIN35 2.5mm²

Insulated cross-connection 10-pole to three-pin initiator terminal DIN35 2.5mm² including screws M2.5. dimension: 49.7x11.4 mm




81535 - Cross connection bolt single M2.5 insulated (4.1 mm)

Cross connection bolt complete with spacer sleeve. 4.1 mm



Product data sheet

30403 - Three-pin initiator terminal DIN35 2.5mm² (6 clamping points)



30408 - Link to cross-connections

to terminals 2.5mm 2



30413RO - Cross-junction rack 20pole red 5.08mm

to 3-step terminals f. proximity switches and Snapline



30413BL - Cross-junction rack 20pole blue 5.08mm


to 3-step terminals f. proximity switches and Snapline



Product data sheet

30403 - Three-pin initiator terminal DIN35 2.5mm² (6 clamping points)

Product systems



Three-stud installation clamps DIN 35

Various three-stud installation clamps.

