





## System overview

Floor channel BOK 8880 200x60mm integrated leveling device



Floor channel BOK 8880 200x60mm with integrated leveling device.

## Components



### 52345 - Installation kit Scs 3FLF horizontal empty BOK

Low current version made of sendzimir galvanized sheet steel 1.5mm with strain relief stampings and knurled screw for lateral fixing in the trunking shell

Dimension: 400x95x41.4mm


Color: RAL 7032 pebble gray



### 55032 - Installation kit Sts 4FLF horizontal empty BOK

made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 376x47(53)x40mm Color: RAL 7032 pebble gray

Equipped: 1 pcs. blind hole clamp 8x2.5mm <sup>2</sup> 10146




### 52260N - Floor duct BOK 8880/200x60 iN

with integrated leveling made of sendzimir galvanized steel sheet 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 60mm / nominal cover width 200mm length: 2000mm



### 52261N - Angle connection BOK 8880/200x60 iN

with integrated leveling made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover support leveling hexagonal screws M10x60 polyamide including connecting material height 60mm / nominal cover width 200mm



### 52262N - T-joint BOK 8880/200x60 iN

with integrated leveling made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover support leveling hexagonal bolts M10x60 polyamide including connecting material height 60mm / nominal cover width 200mm length: 1000mm





## System overview

























### Floor channel BOK 8880 200x60mm integrated leveling device

	<p><b>52263N - Cross connection BOK 8880/200x60 iN</b></p> <p>made of sendzimir-galvanized sheet steel 1.5mm pressed into special aluminum profile Woertz on both sides with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover supportincluding fastening straps and connecting material height 60mm / nominal cover width 200mm length: 1000mm internally levelled.</p>	
	<p><b>52264 - End wall BOK 8880/200x60 SK</b></p> <p>made of sendzimir-galvanized steel sheet 1.5mm pressed into special aluminum profile Woertz with temporary protective edge inserted in groove and impact sound trapezoidal rubber as cover supportincluding connecting material height 60mm / nominal cover width 200mm</p>	
	<p><b>52264/0 - End wall BOK 8880/200x60 SK 0</b></p> <p>made of sendzimir-galvanized steel sheet 1.5mm including connecting material height 60mm / lid nominal width 206mm</p>	
	<p><b>52410/3 - Al protective edge 3 BOK 8880</b></p> <p>made of aluminumDimension: 2000x18x3mm</p>	
	<p><b>52277 - Temporary wooden cover BOK8880/200</b></p> <p>for insertion as a placeholder and protection for the floor channel Dimension: 1000x201x12mm</p>	
	<p><b>51431 - St lid BOK 8880/200 SK</b></p> <p>made of steel sheet 4mm dimension: 500x200mm with opening for connection attachment</p>	
	<p><b>52265 - St lid BOK 8880/200 SK</b></p> <p>made of sendzimir galvanized steel sheet 4mm dimension:1000x200mm</p>	
	<p><b>52272/12 - 0</b></p> <p>for 12mm edge, to BOK 8880/200,Length: 1000mm</p>	
	<p><b>52266 - St lid BOK 8880/200 SK KD</b></p> <p>made of sendzimir-galvanized steel sheet 4mm dimension: 500x200mm cable gland loosely enclosed</p>	
	<p><b>52268 - St lid BOK 8880/200 SK KMn</b></p> <p>made of sendzimir-galvanized steel sheet 4mm dimension: 500x200mm cable tray enclosed loose</p>	



## System overview



















### Floor channel BOK 8880 200x60mm integrated leveling device

	<b>52267 - St lid BOK 8880/200 SK BL</b> made of sendzimir-galvanized steel sheet 4mm dimension: 500x200mm with brush strips as cable outlet, for 3mm finished floor height	
	<b>52272/3 - 0</b> aluminium 2mm galvanised sheet steel reinforced 3mm getoxt. Dimensions: 1000x199x7mm Edge height in 3mm	
	<b>52273/3 - 0</b> made of aluminum 2mm toxtured with galvanized steel sheet insert 3mm. Dimension: 500x199x7mm edge height inside occupiable: 3mm	
	<b>52272/22 - 0</b> for 22mm edge, to BOK 8880/200,Length: 1000mm	
	<b>52273/22 - 0</b> for 22mm edge, to BOK 8880/200,Length: 500mm	
	<b>52274/12 - 0</b> of aluminium dim 500x200 edge 12mm cable trough separately enclosed	
	<b>52410/22 - Al protective edge 22 BOK 8880</b> made of aluminum Dimension: 2000x37x3mm	
	<b>52273/12 - 0</b> for 12mm edge, to BOK 8880/200,Length: 500mm	
	<b>52410/12 - Al protective edge 12 BOK 8880</b> made of aluminum Dimension: 2000x27x3mm	
	<b>52412/3 - Cr protective edge 3 BOK 8880</b> made of chrome steel V2A dimension: 2000x18x3mm	
	<b>52412/12 - Cr protective edge 12 BOK 8880</b> made of chrome steel V2A dimension: 2000x27x3mm	
	<b>52412/22 - Cr protective edge 22 BOK 8880</b> made of chrome steel V2A dimension: 2000x37x3mm	



## System overview






### Floor channel BOK 8880 200x60mm integrated leveling device

	<b>51880 - Cable bushing with filler piece BOK</b> made of polycarbonate crystal clearwith transparent fillerDimension: 86x60x9.5mm	
	<b>52204 - End piece to leveling bar BOK8880/200</b> Dimensions 160x50x4mm Leveling bar additionally used in caseof non-existent brace	
	<b>52091 - Mounting bracket 1 FLF 3/5 empty BOK</b> made of galvanized sheet steel color: RAL 7032 pebble gray	
	<b>52348 - Insert set empty 4-8LM vertical BOK</b> to BOK 8880/ from 60mm height for modules type Legrand Mosaic 45x45 made of galvanized sheet steel color RAL 7032 pebble gray	
	<b>52265/0 - St lid BOK 8880/200 SK 0</b> made of sendzimir galvanized steel sheet 4mm dimension: 1000x206mm	
	<b>52274/3 - 0</b> aluminium 2mm galvanised sheet steel reinforced 3 mm getextDimensions: 500x200x7mm Edge height in 3 mm Loose cable trough	
	<b>55028 - Adapter plate BOK 8880/200x50/60</b> made of sendzimir-galvanized sheet steel 1.5mm for mounting the installation kits in the floor ductincluding fastening material	
	<b>51996 - Installation kit Scs 2FLF horizontal empty BOK</b> Low current versionmade of galvanized steel sheet 1.5mm with strain relief stampings and knurled screw for lateral fixing in the trunking shell. Color: RAL 7032 pebble gray	
	<b>51432 - Connection attachment 2x5FLF vertical BOK</b> Top 200x219x80 for 10 FLF sockets standing Color: at choice	



## System overview





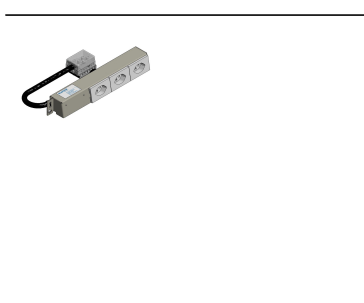

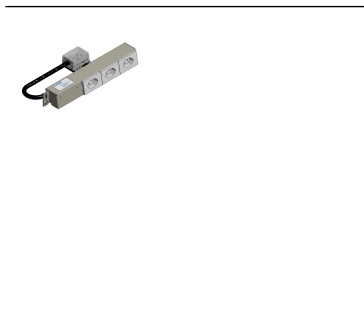

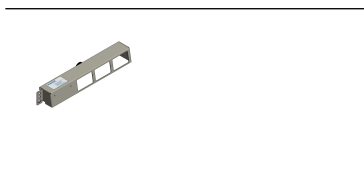

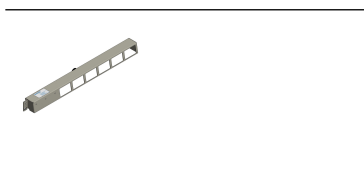



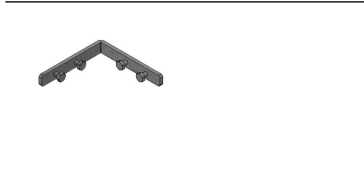

### Floor channel BOK 8880 200x60mm integrated leveling device

	<p><b>55039 - Installation kit socket outlet T13 3FLF horizontal SB BOK</b></p> <p>Installation kit socket T13 3FLF horizontal SB BOK made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped, wired and tested: 1 pcs. blind terminal 7x2.5mm<sup>2</sup> 10127 3 pcs. socket T13 FLF white 55200 1x L1 / 1x L2 / 1x L3 1 pc. Td-cable 5x1.5mm<sup>2</sup> / 1000mm 1 pc. FK junction box technofil 49909 (10A)</p>	
	<p><b>52268/0 - St lid BOK 8880/200 SK 0 KMn</b></p> <p>made of sendzimir-galvanized steel sheet 4mm dimension: 500x206mm with cable trough enclosed loose</p>	
	<p><b>52267/0 - St lid BOK 8880/200 SK 0 BL</b></p> <p>made of sendzimir-galvanized steel sheet 4mm dimension: 500x206mm with brush strips as cable outlet, for 3mm finished floor height</p>	
	<p><b>52269/0 - St lid BOK 8880/200 SK 0</b></p> <p>made of sendzimir galvanized steel sheet 4mm dimension: 500x206mm</p>	
	<p><b>52267/0SB - St lid visible BOK 8880/200 SK 0 BL</b></p> <p>made of sendzimir galvanized sheet steel 4mm dimension: 500x206mm with brush strip as cable outlet, top flush with lid for visible lid</p>	
	<p><b>52274/22 - 0</b></p> <p>of aluminium dim 500x200 edge 22mm cable trough separately enclosed</p>	
	<p><b>52266/0 - St lid BOK 8880/200 SK 0 KD</b></p> <p>made of sendzimir galvanized steel sheet 4mm dimension: 500x206mm with cable gland</p>	
	<p><b>52279/0SB - Cr lid visible BOK 8880/200 SK 0 BL</b></p> <p>made of chrome steel V2A 4mm, brushed Dimensions: 490x206mm With brush strip 54x30mm as a cable outlet Top flush for visible cover</p>	
	<p><b>52278/0SB - Cr lid visible BOK 8880/200 SK 0</b></p> <p>made of chrome steel V2A 4mm, brushed dimension: 990x206mm</p>	
	<p><b>55019 - Installation kit bticino 2x2-3gang empty BOK</b></p> <p>made of galvanized sheet steel color: RAL 7032 pebble gray</p>	



## System overview

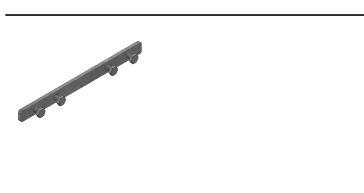










### Floor channel BOK 8880 200x60mm integrated leveling device

	<p><b>52402 - Mounting bracket 60 BOK 8880/60</b></p> <p>made of sheet steel 2.5mm for floor trunking BOK 8880 height 60mm</p>	
	<p><b>52407 - Connecting link straight BOK 8880</b></p> <p>made of sheet steel dimension: 130x10x2.5mm with 4 pieces hexagonal screws M4x8 for connecting the channel shells</p>	
	<p><b>55041 - Installation kit socket T23 3FLF horizontal SB BOK</b></p> <p>Installation kit socket T23 3FLF horizontal SB BOK made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped, wired and tested: 1 pcs. blind terminal 7x2.5mm<sup>2</sup> 10127 3 pcs. socket T23 FLF white 55210 1x L1 / 1x L2 / 1x L3 1 pc. Td-cable 5x2.5mm<sup>2</sup> / 1000mm 1 pc. FK socket SK ecobus power 5x2.5<sup>2</sup> Pow 5P 49701P (16A)</p>	
	<p><b>52344 - Insert Sts 3FLF horizontal SB BOK</b></p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell Dimensions: 302x47(53)x40mm Color: RAL 7032 pebble gray equipped, wired and tested: 1 pcs. blind hole terminal 7x2.5mm<sup>2</sup> 10127 3 pcs. socket T13 FLF white 55200 1x L1 / 1x L2 / 1x L3 1 pcs. Td cable 5x1.5mm<sup>2</sup> / 1000mm. 1 pc. FK socket SK ecobus power 5x2.5<sup>2</sup> Pow 5P 49701P (16A)</p>	
	<p><b>55031 - Installation kit Sts 3FLF horizontal empty BOK</b></p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 302x47(53)x40mm Color: RAL 7032 pebble gray Equipped: 1 pcs. blind hole clamp 7x2.5mm<sup>2</sup> 10127</p>	
	<p><b>55033 - Installation kit Sts 6FLF horizontal empty BOK</b></p> <p>made of galvanized sheet steel 1.5mm with knurled screw for lateral fixing in the trunking shell. Dimension: 525x47(53)x40mm Color: RAL 7032 pebble gray Equipped: 1 pcs. blind hole clamp 10x2.5mm<sup>2</sup> 10128</p>	
	<p><b>51049 - Adjustable cable trough BOK 8880 fDsb</b></p> <p>made of polycarbonate crystal clear for cover visible for mounting with threaded bolt</p>	
	<p><b>52408 - Angle connecting link 90° BOK 8880</b></p> <p>made of sheet steel dimension: 67.5/67.5x10x2.5mm with 4 pcs hexagonal bolts M4x8 for connecting the channel shells</p>	



## System overview

### Floor channel BOK 8880 200x60mm integrated leveling device

	<p><b>52415 - U-clamp profile reinforced 1-3mm</b> as edge protection profile for sheet thickness up to 3mm</p>	
	<p><b>52204/100 - Leveling bar connection BOK8880/200</b> made of sendzimir galvanized steel sheet 4mm dimensions: 160x100mm with 3 leveling hexagonal screws M10x60 polyamide with blind rivets for fastening to channel shell for additional mounting in case of missing connection.</p>	
	<p><b>52269 - St lid BOK 8880/200 SK</b> made of sendzimir galvanized steel sheet 4mm dimension: 500x200mm</p>	
	<p><b>51069 - Cable trough levelable BOK SK 0-21mm</b> made of polycarbonate crystal clear for cover visible for mounting with threaded bolt</p>	
	<p><b>52420 - Brush strip cpl. BOK 8880 s=6</b> made of plastic, black dimension: 54x35mm bristles length: 25mm</p>	
	<p><b>52421 - Brush strip cpl. BOK 8880 s=4 visible</b> made of plastic, black dimension: 54x37mm bristles length: 30mm</p>	