



Product data sheet

49713/L1 - Junction box flat cable combi 3P C1 Q L1



Junction box 3P, outer conductor L1, with socket 3-pole, only for heavy current, with socket 3-pole code 1

Characteristics	
Eldas number	150700137
Base Unit	Piece
availability	available from stock
EAN Code	7611718218187
group	170000
Packing	50
country of origin	CH
Customs tariff number	8536.9080
Weight (g)	40 g
Color	black
Coding plug connection	Code 1
Technical data	
Box Type	Junction boxes
Fire load (KWh)	0,18 kWh
Dimensions length x width x height (mm)	34,5x57,5x25,7 mm



Product data sheet

49713/L1 - Junction box flat cable combi 3P C1 Q L1



Dimensions length x width x height (inch)	1,36x2,26x1,01 inch
Degree of protection	IP20, IP40 (Connected)
Metal parts	Korrosionsgeschützt
Flat cable contacting type	Piercing-Kontaktierung (Schraube)
Number of poles	3 pole
Rated current heavy current part (A)	16 A
Rated voltage heavy current part (V)	250 V
Operating Temperature (°C)	-15 bis 85 °C
Installation temperature min. (°C)	5 °C
Plastic parts	Halogenfrei
Material slider/bottom part	Polyamid, Lila
Material housing	Polyamid , schwarz
Material hood	Polycarbonat, transparent
Number Screwdriver Pointed screws Heavy current part	1
Operating torque of pointed screws for heavy current section (Nm)	0,7 Nm



Product data sheet

49713/L1 - Junction box flat cable combi 3P C1 Q L1

Product accessories


	Stecker_01_03 - Connexions enfichable Code 1 pour tension de réseau, 3 pôles null
	49750 - Locking to connectors For mechanical connection of socket to plug 3 and 5 poles



Product data sheet

49713/L1 - Junction box flat cable combi 3P C1 Q L1

Product systems

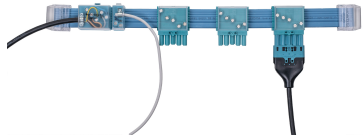

Flat cable system Dali 5G2.5 2x1.5 mm²

This flexible system combines power current and Dali bus line in one cable application. It is the basis for decentralized lighting control.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.



Flat cable system Combi 5G2.5 2x1.5 mm²

This flexible system combines power current and bus data line in one cable application and is the basis for decentralized building automation.

The areas of application are office and public buildings, industrial buildings, hotels but also modular buildings with a high degree of prefabrication.

